

Disinfectant Application System

MODEL 3WP150-C

Hydro Engineering Inc's portable Disinfectant Application System (DAS[®]), is the best available technology for bio-security protection. This engineered equipment package comes factory tested and requires minimal assembly. Automatic disinfectant application to undercarriage, sides and top of vehicles. Disinfectant is automatically mixed to manufactures specifications. Utilities required are power, water and disinfectant.

Standard Features:


- Photo eye activation, entry only
- Solids filtration to 20 micron nominal
- Manual sludge drain return to Hydropad

Optional Features:

- Photo eye activation, entry & exit
- Interval timer for solids filtration
- Motorized sludge drain return to Hydropad

Specification:

- 208/230 Volt 1-P 60 Hz
- Dimensions: 96" L X 240" W X 168" H (not including ramps)
- Variable Capacity: 50 to 140GPM
- Weight approx. 4150LBS

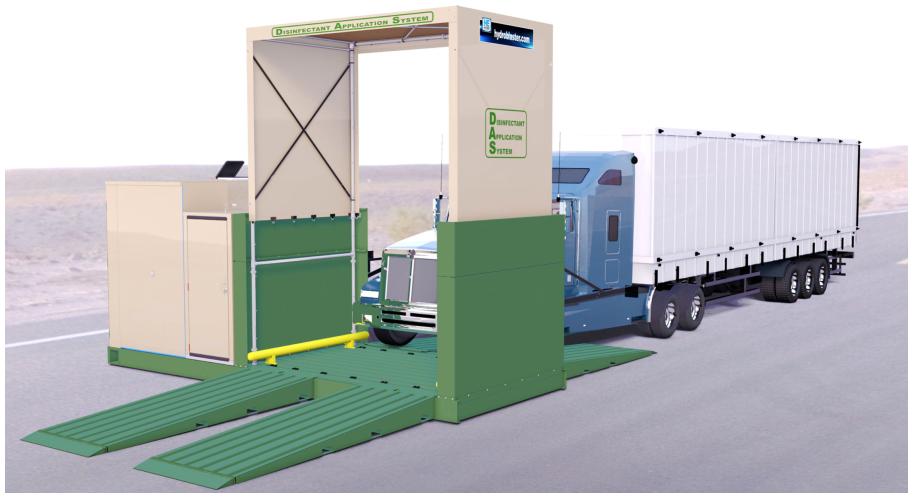

1. Specification are effective 2023
2. Specification subject to change without notice 2023