

NOTES:

1. SPACE REQUIREMENTS

PROVIDE MIN. 6" ON REAR SIDE. ALLOW ENOUGH SPACE AROUND THE UNIT FOR ACCESS AND SERVICE.

2. POWER REQUIREMENTS

POWER TO BE SUPPLIED ON SEPARATE PROTECTED CIRCUIT BY OTHERS PER REQUIREMENTS LISTED ON TABLE OR ON SUPPLEMENTAL SPECIFICATION SHEET.

3. PLUMBING CONNECTIONS


WATER REQUIREMENTS

INLET WATER SUPPLY TO BE PROVIDED FROM RST TANK. SHUT-OFF (ISOLATION) VALVE (HEI SUPPLIED) MOUNTED AT THE INLET TO THE PUMP.

CONNECTIONS


1-1/2" HOSE PROVIDED AT INLET
1-1/2" DISCHARGE

SPECIFICATIONS TABLE	
SPEC.	40 PSI @ 60GPM 50/60Hz
VOLTAGE	220 - 1PH
AMPERAGE	16
PUMP MOTOR HP	3
WEIGHT (LBS)	160

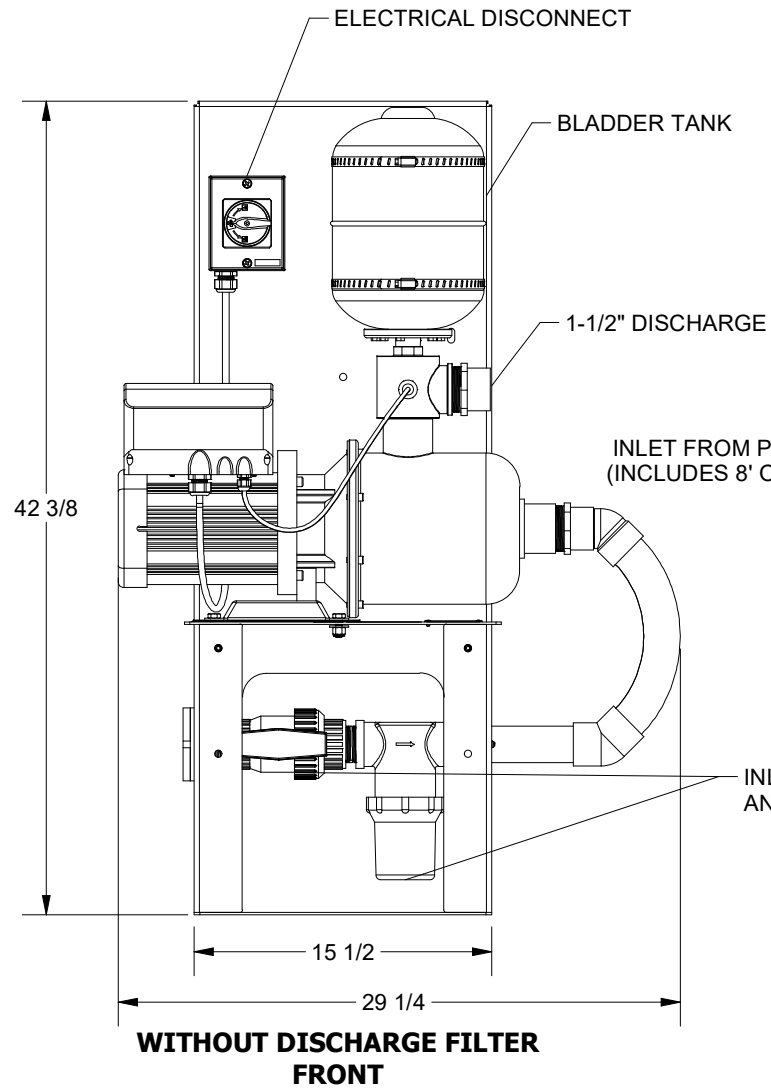


INLET FROM PROCESS TANK
(INCLUDES 8' OF 1-1/2" HOSE)



INLET WATER FILTER
AND SERVICE VALVE

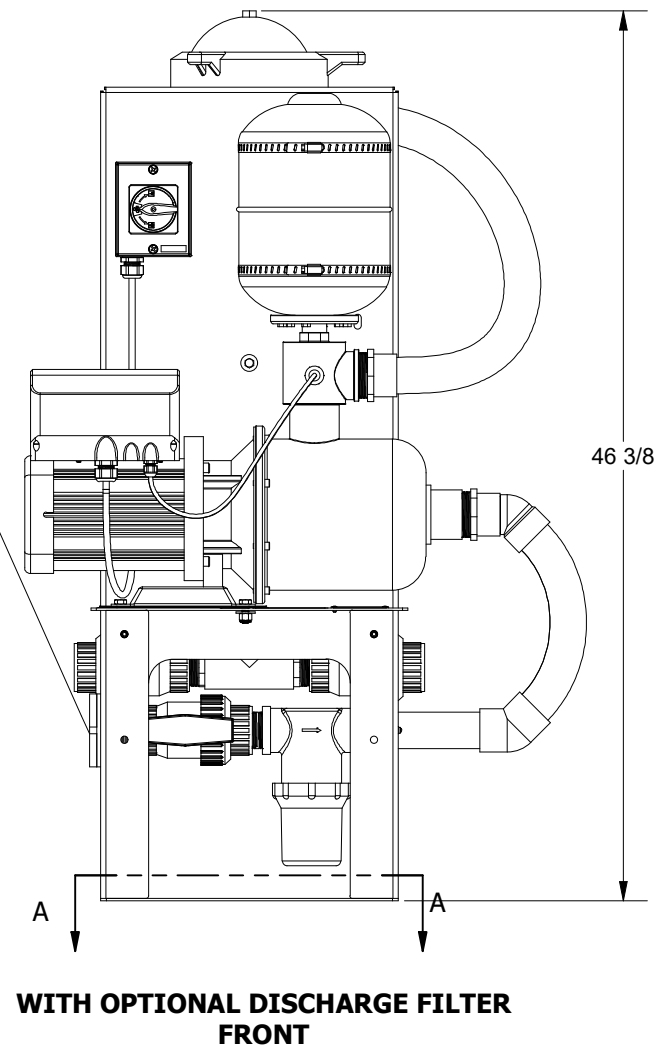

**WITH OPTIONAL DISCHARGE FILTER
FRONT**

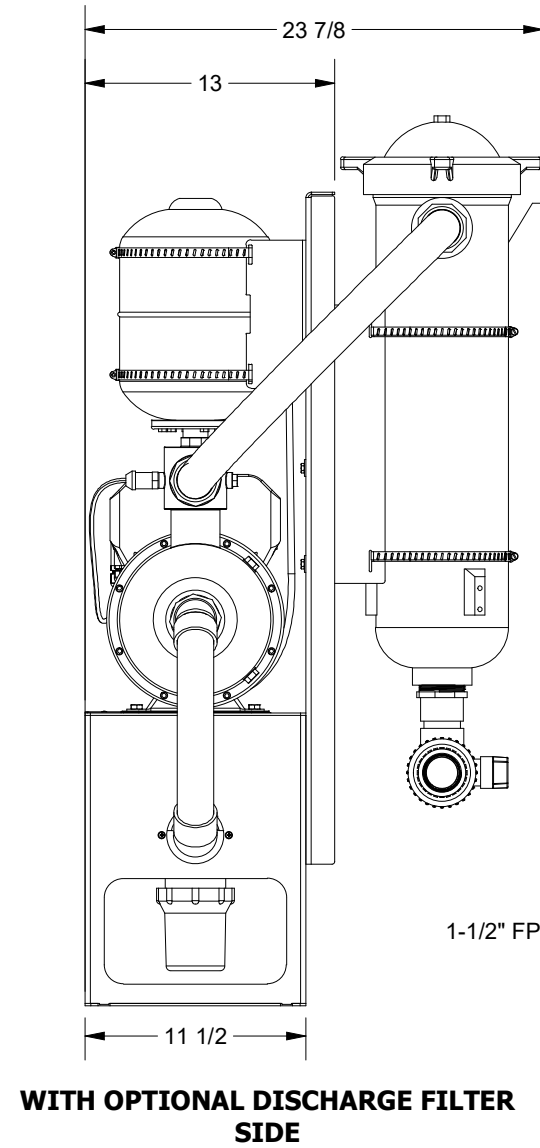


**WITH OPTIONAL DISCHARGE FILTER
SIDE**

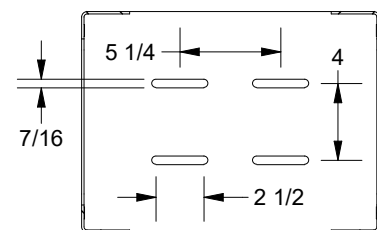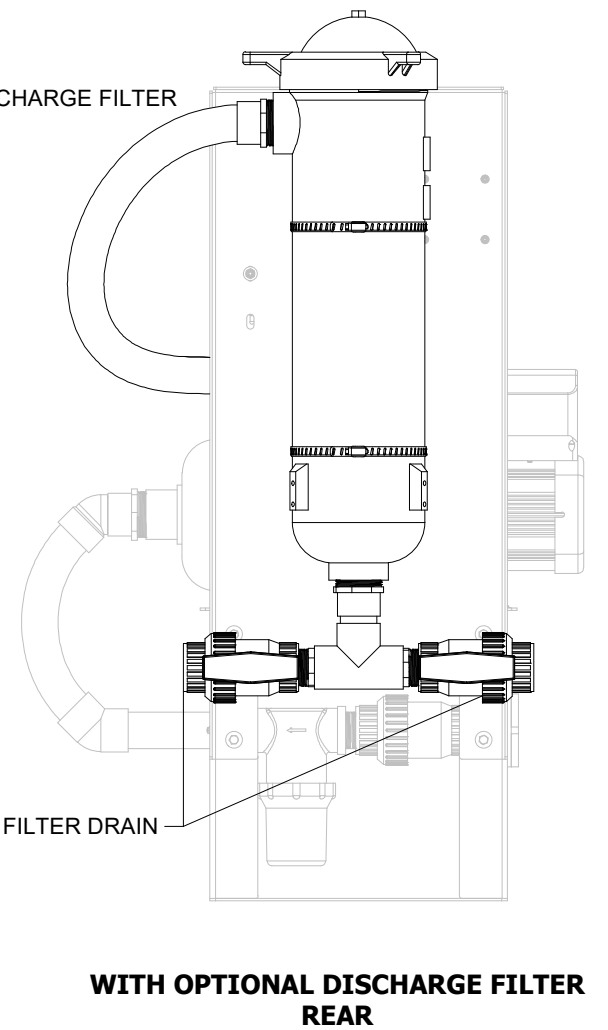

**SECTION A-A
FLOOR MOUNT BOLT HOLES**

UNLESS OTHERWISE INDICATED: DIMENSIONS ARE IN INCHES. REMOVE ALL BURRS & SHARP EDGES. TOLERANCES AS FOLLOWS: ± .1" ON ANGLES	DRWN	RRG	DATE	11/03/22
	REVISED	RRG	DATE	06/28/24
	APPR		DATE	
	DESIGNER(S)	RRG		



DWG TITLE	1UU171 REPRESSURIZATION SYSTEM, 40PSI @ 60GPM	
PROJECT / DWG TYPE	DIMENSIONAL SPECIFICATIONS	
HYDRO ENGINEERING INC.	865 W. 2600 S., SALT LAKE CITY, UT 84119	
DWG FILE	W:\CAD\SPCS\REPRESSURIZATION\1UU171\	
VAULT FILE	SD1UU171.idw	DWG P/N: SD1UU171